

New!


# Akylite®

Polypropylene Bubble Structure Sheet

Light graphic medium



## Ideal medium for screen and digital printing

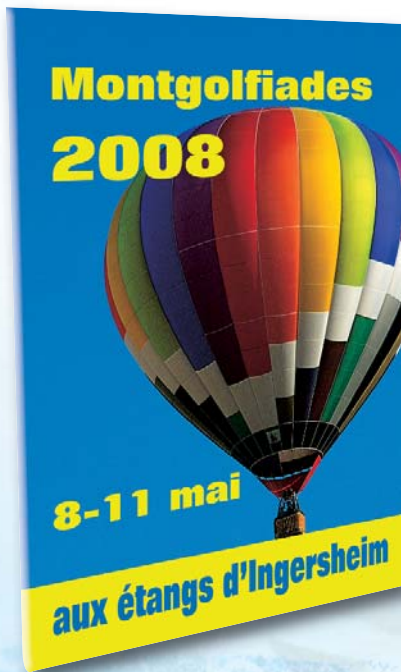


- ~ Flat with a lovely surface appearance (no relief) for optimum printing quality
- ~ Isotropic structure/no directionality  
Only 1 format to stock

Thanks to its advantages in terms of structure, surface appearance, weight and handling, Akylite® fulfills printing requirements in the optimum way.

### Properties

- ~ 100% recyclable product, which does not give off any harmful substances if burnt
- ~ Easy to handle, cut and score
- ~ Tear resistant

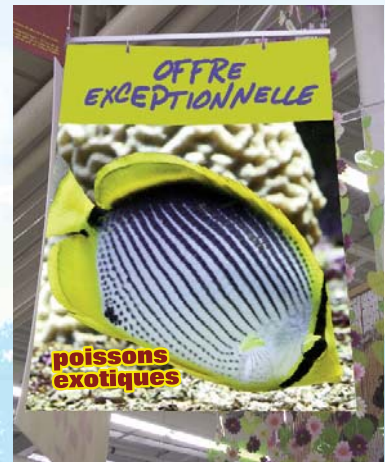

### Treatments

- ~ Corona, treatment lifetime of 3 months, value: 42 dynes/cm
- ~ Antistatic treatment on request

VISUAL  
COMMUNICATION

## KaysersbergPlastics

a part of D5Smith Plastics

[www.kaysersberg-plastics.com](http://www.kaysersberg-plastics.com)



### Range

Thickness (mm)	2,5	2,8
Grammage (g/m <sup>2</sup> )	450	600
Length (mm)	>500	>500
Standard format (mm)	800 x 1200	800 x 1200
Color	White	White
Bubble diameter (mm)	4	4

Other formats available on request/width between 1,200 and 1,500 mm.

Tolerances	Grammage +/-10%	Thickness +/-5%	Length +/-2%	Width +/-1%
------------	--------------------	--------------------	-----------------	----------------

### Technical Characteristics

Thickness (mm)	2.5	2,8	Test Method
Grammage (g/m <sup>2</sup> )	450	600	
Flexural resistance (N/mm) (distance between supports 100 mm, crosshead speed 5 mm/min)	0,9	1,6	ISO 178
Bend fracture strength (N) (distance between supports 100 mm, crosshead speed 300 mm/min)	5	13	ISO 178
Rigidity and tear and fold resistance	yes	yes	
Permitted temperatures (°C)	-20 to +90	-20 to +90	
Water, moisture and weather resistance at ambient temperature. Moisture uptake	0.03% in 24hrs and 0.06% in 6 months		
Shock resistance (23 °C and -30 °C) (500 g ball falling from 250 mm)	no damage	no damage	internal
Dimensional variation (h. 22 at 70 °C)	<0,5%	<0,5%	internal

The results obtained and the properties mentioned refer to the average values of the laboratory tests carried out on standard production samples. It is understood that these data do not involve any obligation and/or responsibility on the part of Kaysersberg Plastics. We advise our customers to check that our products are properly suited to their specific final applications. This document does not therefore reiterate the specifications of the products described nor should it in any way be treated as a technical data sheet.

### Recommended Inks

This information is only indicative and is non-exhaustive. A test print should be run in all cases. Do not hesitate to contact the suppliers for further information. Digital ink tests are currently underway.

Suppliers	Technique	Inks
MARABU	Silk screen	Maraprop PP Marapoly P Ultraform UV FM170
SERICOL	Silk screen	Polydyne YD+ZC521 Poluscreen PS386+ZV551 Multydyne LY+ZE818 Uviplast UP+ZE832
BRANCHET	Silk screen	Kromoplast range
DUBUIT	Silk screen	Uviplak + 5% hardener ST305

# Akylite®

A Kaysersberg Plastics product

**DS SMITH KAYERSBERG SAS**  
 B.P. 27  
 68240 Kaysersberg  
 Tel.: +33 (0)3 89 78 32 65  
 Fax: +33 (0)3 89 78 38 56  
 E-mail: christine.klack@kayplast.com

The information contained in this document is for information purposes and is non-contractual. The manufacturer reserves the right to change the product and its technical characteristics. This information has been supplied in good faith and does not in any way constitute a guarantee for specific conditions of use.  
 DS SMITH KAYERSBERG - Établissement Plastiques - SAS au capital de 53 816 000 € - RCS COLMAR 572 219 202 SIRET 572 219 202 00072

PRINT 168 GB 05/2008

Non-contractual photos - Designed and produced by EURHODE business services - www.eurhode.com